

Balancer / Balancers 1694(..)



Traglastbereich 15,0 - 180,0 kg | Seil 2,5 / 3,0 m
Capacity 15.0 - 180.0 kg | Cable 2.5 / 3.0 m

Technische Eigenschaften:

- Gehäuse aus robustem Aluminiumguss
- Stahldrahtseil (Niro)
- Traglastbereich: stufenlos, präzise einstellbar
- Trommelkörper: kugelgelagert
- Seillänge: einstellbar
- Aufhängung: Sicherheitshaken, drehbar
- Manuelle Trommelblockierung

Sicherheitseinrichtung:

- Zusätzliche Sicherheitsaufhängung
- Absturzsicherung bei Federbruch

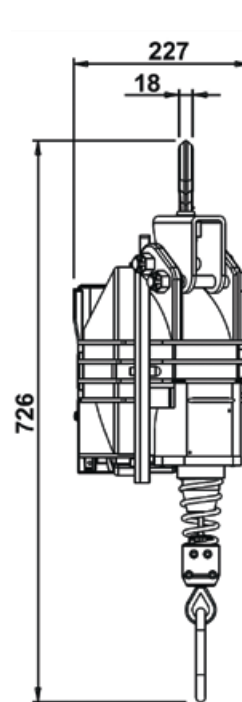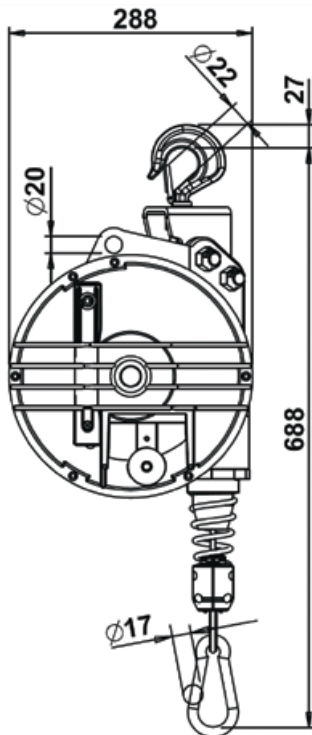

Zugkette optional für Trommelblockierung

Optional: Locking / unlocking device with control from floor level

Technical features:

- Body: aluminium alloy
- Cable: stainless steel
- Continuous cable adjustment
- Taper drum rotating on ball bearings
- Capacity adjustment via worm screw
- Upper suspension: safety hook, rotatable
- Locking device

Safety device:


- Auxiliary safety suspension
- Safety device in case of spring-breakage

Artikel - Nr. Article - No.	Seilauszug Cable travel (m)	Traglastbereich Capacity (kg)	Gewicht Weight (kg)
169401	2,5	15 - 20	19,67
169402	2,5	20 - 30	21,11
169403	2,5	30 - 40	21,11
169404	2,5	40 - 50	22,03
169405	2,5	50 - 60	23,07
169431	3	15 - 20	19,67
169432	3	20 - 25	19,67
169433	3	25 - 35	21,11


Balancer / Balancers 1694(..)

Traglastbereich 15,0 - 180,0 kg | Seil 2,5 / 3,0 m

Capacity 15.0 - 180.0 kg | Cable 2.5 / 3.0 m

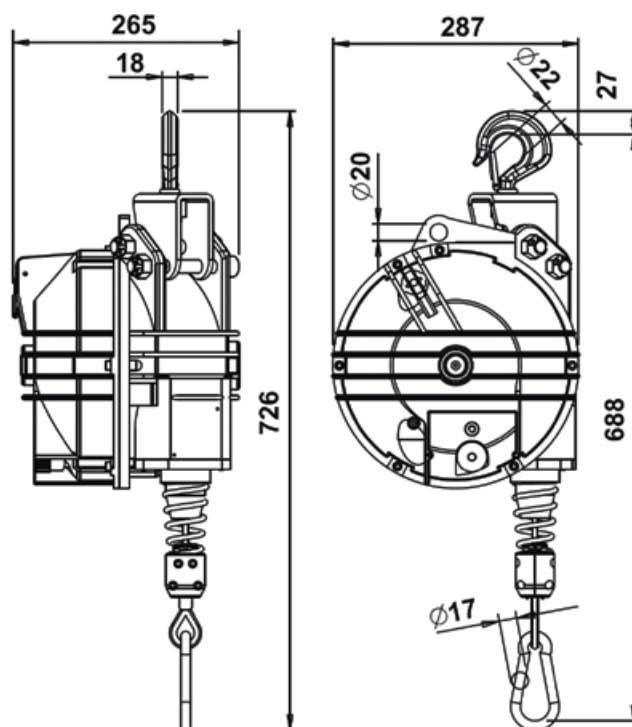

Artikel - Nr.	Seilauszug	Traglastbereich	Gewicht
Article - No.	Cable travel	Capacity	Weight
	(m)	(kg)	(kg)
169411	2,5	60 - 70	25,56
169412	2,5	70 - 80	26,75
169413	2,5	80 - 90	27,9
169414	2,5	90 - 100	28,46
169434	3	35 - 45	24,46
169435	3	40 - 50	23,65
169436	3	50 - 60	24,69
169441	3	60 - 70	25,56
169442	3	70 - 80	26,75
169443	3	80 - 90	27,9
169444	3	80 - 100	28,46

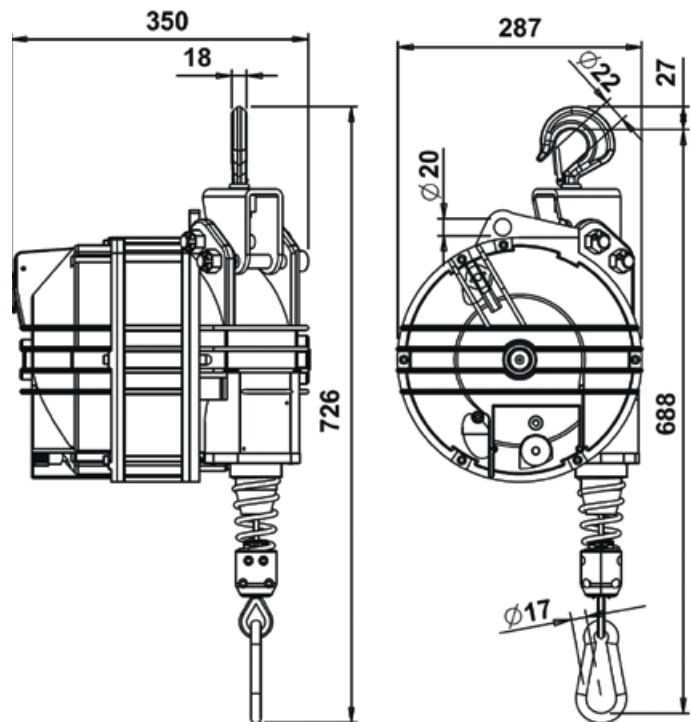

Artikel - Nr. Article - No.	Seilauszug Cable travel (m)	Traglastbereich Capacity (kg)	Gewicht Weight (kg)
169422	2,5	100 - 120	36,61
169423	2,5	120 - 140	38,51
169424	2,5	130 - 150	38,83
169425	2,5	140 - 160	40,9
169426	2,5	160 - 180	43,2
169451	3	100 - 115	36,61
169452	3	115 - 130	36,77
169453	3	130 - 140	38,51
169454	3	140 - 150	38,83
169455	3	150 - 160	40,9
169456	3	160 - 180	43,2